




KINGSTON

KITCHEN & BATH

INSTALLATION INSTRUCTIONS Ceiling Support



Parts:

Mounting Screw & Anchor	Set Screw
	
2 Pcs	2 Pcs

CAUTION

Failure to follow all installation directions may cause product to detach from the wall and cause serious injury


www.kingstonbrass.com
TOLL-FREE CUSTOMER SERVICE: 1-877-2-KBRASS
TECHNICAL SUPPORT E-mail: service@kingstonbrass.com
12775 Reservoir Street, Chino, CA 91710

Before Installation :

1. Decide the proper installation position on your shower curtain rail.
2. Measure the distance from the ceiling to the shower curtain rail to check if it is 36-1/2" ~ 37".
3. If the distance measured smaller than 36-1/2", you can cut the top end of brass tube with a pipe cutter or a hacksaw to acquire the length.

Installation Step:

1. Loosen set screws and tube insert to remove the rail tube which you are going to fix with the ceiling support.
2. Thread the support rod onto the rail holder, insert the wall bracket into the support rod. Slide the rail holder into the rail tube.
3. Install the rail tube to rebuild the shower curtain rail.
4. Move the rail holder to the desired position on the rail tube.
5. Push up the wall bracket to attach the ceiling and mark the position of screw holes.
6. Drill holes (1/4") on the ceiling, then install the anchors with a hammer.
7. Secure the wall bracket on the wall by tightening up the wood screws. Tighten up set screw on the wall bracket to secure the support rod.
8. Tighten up set screw with an Allen wrench to secure the rail holder on the shower curtain rail.

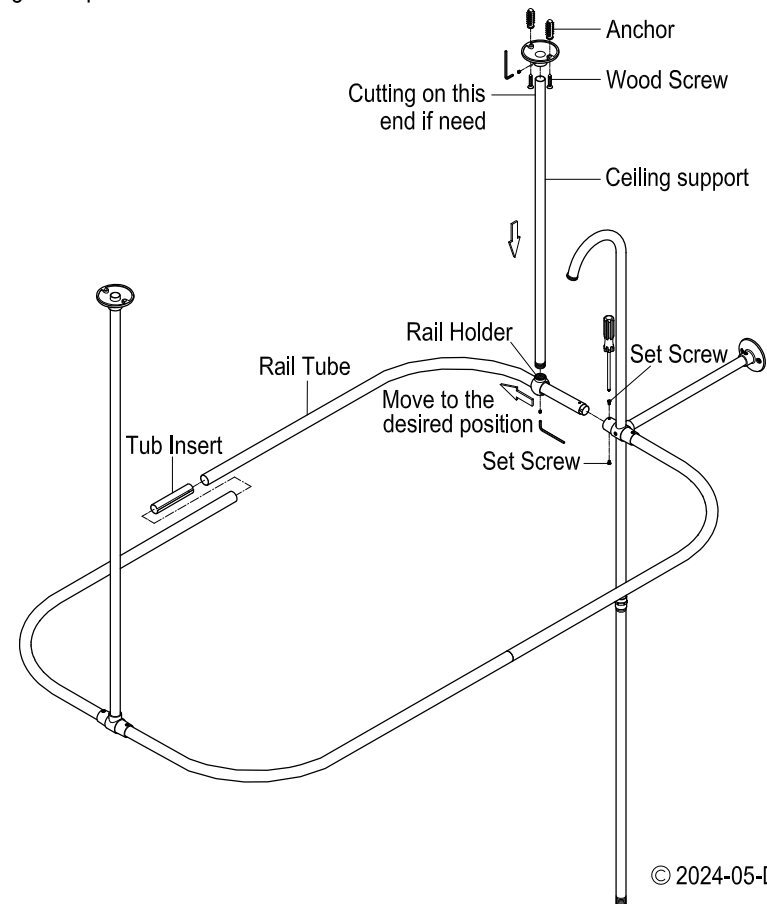

© 2024-05-D Kingston Brass