

KINGSTON

KITCHEN & BATH

INSTALLATION INSTRUCTIONS


Lift & Lock Drain

TOOLS REQUIRED



INSTALLATION INSTRUCTIONS:

1. Using either a 4 way or a dumbbell wrench remove old drain and clean area around the drain opening.
2. Remove drain stopper by loosening the screw below the stopper.
3. Apply plumbers putty under the drain flange, apply Teflon tape on threads.
4. Place one or two rubber washers under the tub. If the tub bottom is thicker, you need to place only one rubber washer.
5. Carefully thread drain by hand, finish tightening using the 4 way wrench or the dumbbell wrench.
6. Clean any excess plumber putty and re-install the drain stopper.

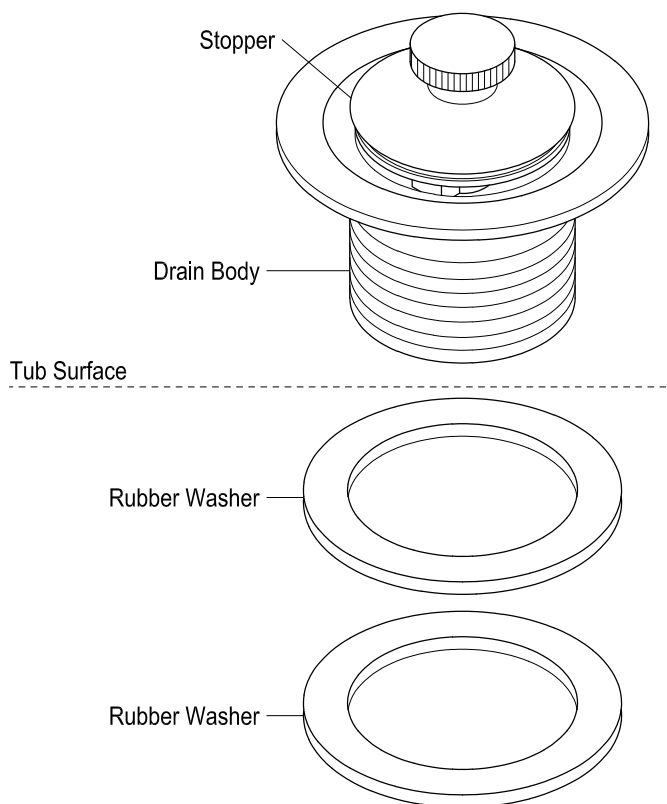

NOTICE

Failure to follow all directions may cause leaks which may result in water damage

www.kingstonbrass.com
TOLL-FREE CUSTOMER SERVICE: 1-877-2-KBRASS
TECHNICAL SUPPORT E-mail: service@kingstonbrass.com
12775 Reservoir Street, Chino, CA 91710