


KINGSTON

KITCHEN & BATH

L Shape Grab Bar Installation

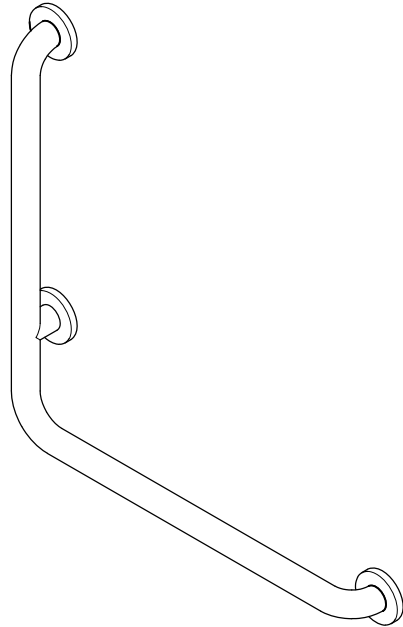

Parts:

Mounting
Screw



8 Pcs

Before you begin your installation:

1. A grab bar is only as good as the way it's installed.
2. Make sure to confirm that there is proper wood backing at all three points of attachment for this grab bar.
3. If there is no wood backing available at all three points, attach a 2" x 6" minimum piece of lumber between the studs.
4. Maximum weight capacity is 330 LBS.

CAUTION

Failure to follow all installation directions may cause product to detach from the wall and cause serious injury

www.kingstonbrass.com
TOLL-FREE CUSTOMER SERVICE: 1-877-2-KBRASS
TECHNICAL SUPPORT E-mail: service@kingstonbrass.com
12775 Reservoir Street, Chino, CA 91710

TOOLS REQUIRED



Flathead Screwdriver




Phillips Screwdriver




Marking Pencil



Hammer



Power Drill

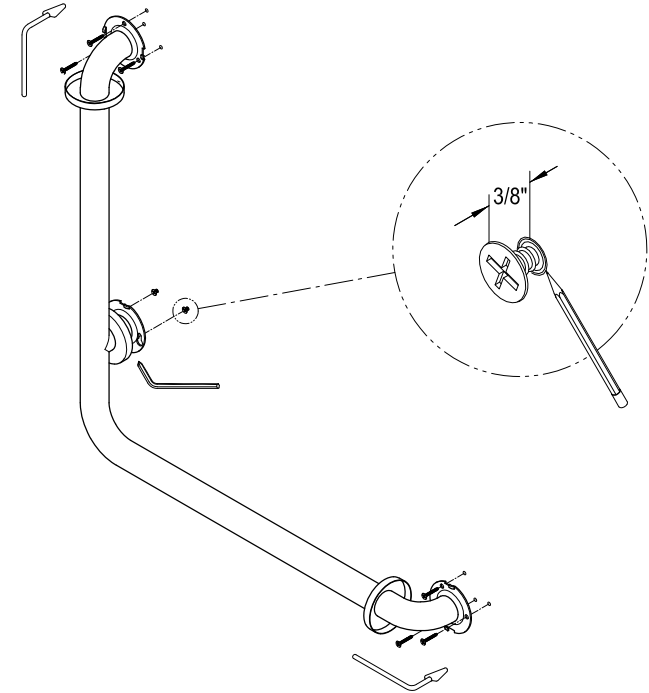

Installation Steps:

- Step 1. Place the grab bar at the desired location and mark the location of the holes, the middle flange is equipped with keyhole style holes, make sure to mark those at the narrow part of the hole.
- Step 2. Drill starter holes(5/64") at all the locations where the screws will be located.
- Step 3. Insert only the screws for the center flange, leaving a gap of approximately 3/8".
- Step 4. Place grab bar at the desired location, insert middle plate of grab bar through the wider part of the keyhole shaped holes, until all 2 screws are fully inside the narrow part of the hole.
- Step 5. Tighten screws using the enclosed "L" shaped Phillips screwdriver, align the tabs on the flange with the notches on the base plate, push flange and turn on a clockwise direction.
- Step 6. Secure grab bar by fully threading all 6 screws at both ends.

Cleaning

Clean with a damp cloth only.
Avoid using metal or abrasive polishes.

©2022-10-E Kingston Brass