





Grab Bar with Soap Holder Installation Instructions

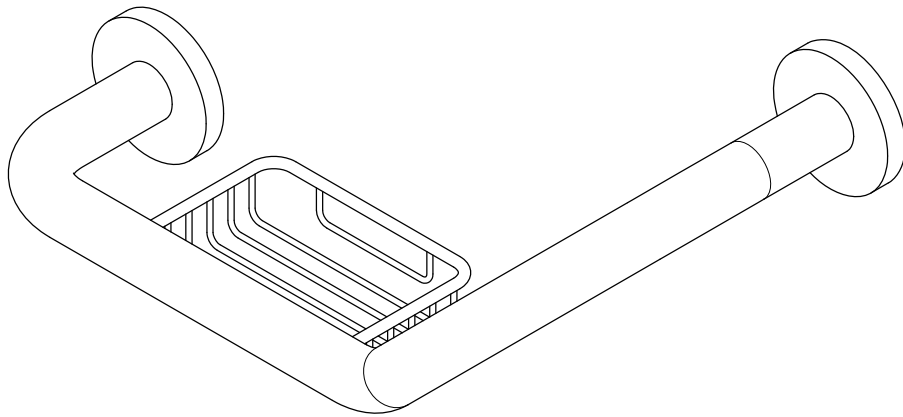

Parts:

Mounting
Screw



6 Pcs

www.kingstonbrass.com

TOLL-FREE CUSTOMER SERVICE: 1-877-2-KBRASS
TECHNICAL SUPPORT E-mail: service@kingstonbrass.com
12775 Reservoir Street, Chino, CA 91710


CAUTION

Failure to follow all installation directions may
cause product to detach from the wall and
cause serious injury


Tools Required




Marking Pencil



Electric Screwdriver



Power Drill

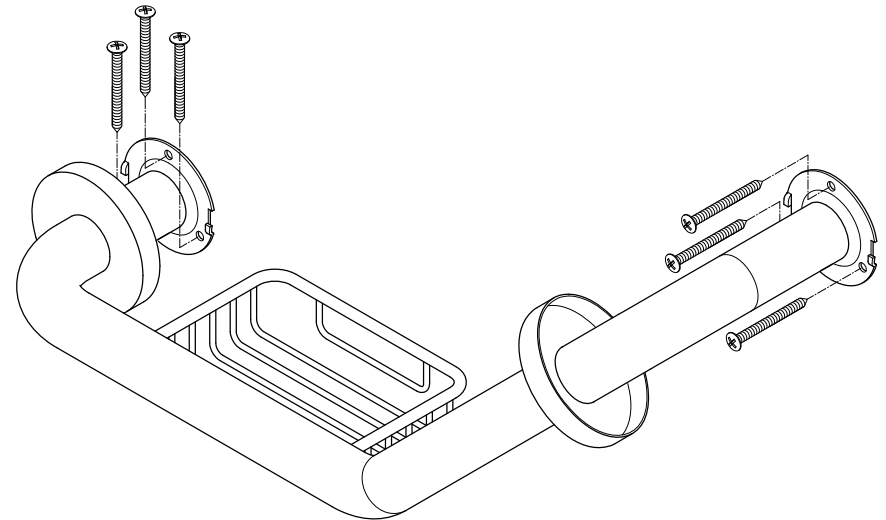

Before you begin your installation:

1. For your own safety, this grab bar should be installed by a licensed professional.
2. A grab bar is as good as the way it's installed.
3. Make sure to confirm that there is proper wood backing at both points of attachment for this grab bar.
4. If there is no wood backing no wood backing available at both point, attach a 2" x 6" minimum piece of lumber between the studs.
5. Maximum weight capacity is 292 LBS (132 KGS).

Installation Steps:

1. Place bar at the desired location. Level and mark the location of the holes.
2. Remove bar and drill starter holes (5/64").
3. Mount grab bar to the wall using 2" screws, due to the tight space, it might be necessary to use electric screwdriver.
4. Press flanges to the base and turn clockwise to lock in place.

Cleaning

Clean with a damp cloth only.
Avoid using metal or abrasive polishes.

©2025 LVC Kingston LLC. All Rights Reserved.
2025-05-T