


# KINGSTON

KITCHEN & BATH

## Grab Bar Shelf Installation

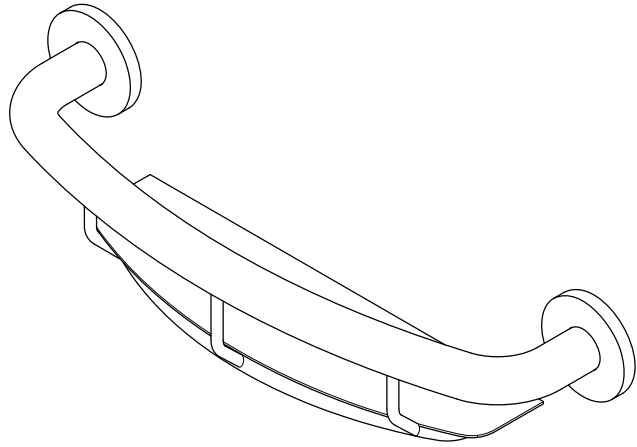

### Parts:

Mounting  
Screw



6 Pcs

### Before you begin your installation:

1. A grab bar is as good as the way it's installed.
2. Make sure to confirm that there is proper wood backing at both points of attachment for this grab bar.
3. If there is no wood backing available at both points, attach a 2" x 6" minimum piece of lumber between the studs.
4. If a proper wood bracing is not available, consult your contractor as to the best anchors to use for your specific application some options available are Tile/ masonry anchors, toggle bolts, plastic anchors, metal anchors and drywall anchors
5. Maximum weight capacity is 300 LBS.

**CAUTION**

Failure to follow all installation directions may cause product to detach from the wall and cause serious injury

www.kingstonbrass.com  
TOLL-FREE CUSTOMER SERVICE: 1-877-2-KBRASS  
TECHNICAL SUPPORT E-mail: service@kingstonbrass.com  
12775 Reservoir Street, Chino, CA 91710

### TOOLS REQUIRED



Flathead Screwdriver




Phillips Screwdriver




Marking Pencil



Hammer



Power Drill

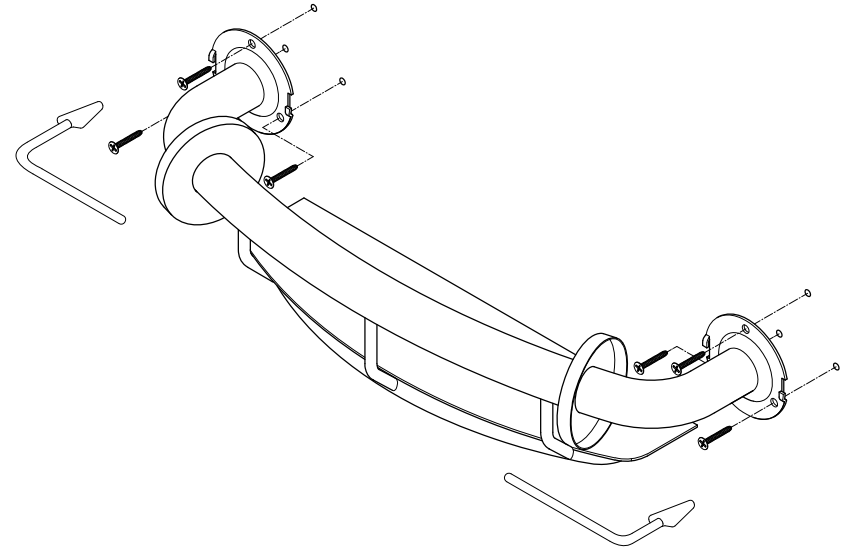

### Installation Steps:

- Step 1. Place bar at the desired location. Level and mark the location of the holes.
- Step 2. Remove bar and drill starter holes (5/64").
- Step 3. Mount grab bar to the wall using 2" screws, or the appropriate anchors for your specific wall type.
- Step 4. Press flanges to the base and turn clockwise to lock in place.

### Cleaning

Clean with a damp cloth only.  
Avoid using metal or abrasive polishes.

©2022-10-E Kingston Brass