


# KINGSTON

KITCHEN & BATH

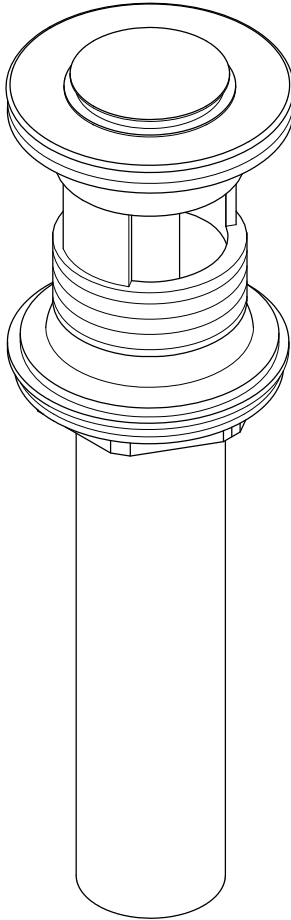

## NOTICE

Failure to follow all directions may cause leaks  
which may result in water damage

[www.kingstonbrass.com](http://www.kingstonbrass.com)

TOLL-FREE CUSTOMER SERVICE: 1-877-2-KBRASS

TECHNICAL SUPPORT E-mail: [service@kingstonbrass.com](mailto:service@kingstonbrass.com)

12775 Reservoir Street, Chino, CA 91710


# KINGSTON

KITCHEN & BATH

## INSTALLATION INSTRUCTIONS

### Push Drain with Overflow

#### Need Tools:




Basin Wrench




Adjustable Wrench



Teflon Tape




Silicone Sealant



Screwdriver

#### INSTALLATION:

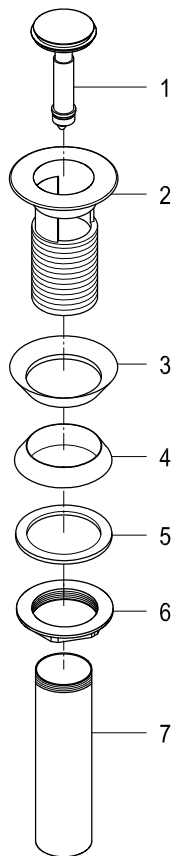

1. Remove the lock nut (6), washer (5) and rubber gasket (4) from the drain body (2).  
Push rubber gasket (3) upwardly against the underside of flange of drain body (2).
2. Insert the drain assembly (1)/(2)/(3)/(7) downwardly through the drain opening on the bottom of sink. So the tailpiece (7) and the outer threads of drain body (2) can go all the way through the drain opening and expose beneath the sink.
3. Adjust rubber gasket (3) to fit in the drain opening snugly. Make sure the taper-surface side of the rubber gasket (3) is downward.
4. Install rubber gasket (4), washer (5) and lock nut (6) upwardly onto the drain body (2) from the end of tailpiece(7). Make sure the taper-surface side of the rubber gasket (4) is upward.
5. Slowly tighten up the lock nut (6) with a wrench until the rubber gasket (4) can completely and tightly seal the drain opening beneath the sink.
6. Turn the tailpiece (7) by hand to remove it from drain body (2). Apply Teflon tape on the threads of tailpiece (7). Then re-connect it tightly with drain body (2).
7. Push the stopper (1) to the close position of the flange body (2), then turn on faucet to full fill water in the sink. Examine and make sure no water comes out from the tailpiece (7).
8. Push the stopper (1) to the open position to drain water, examine to make sure no water leakage around the rubber gasket (4) or connection with tailpiece (7).  
If leakage found, adjust the rubber gasket (4) and re-tighten up the lock nut (6) until no more leakage.