

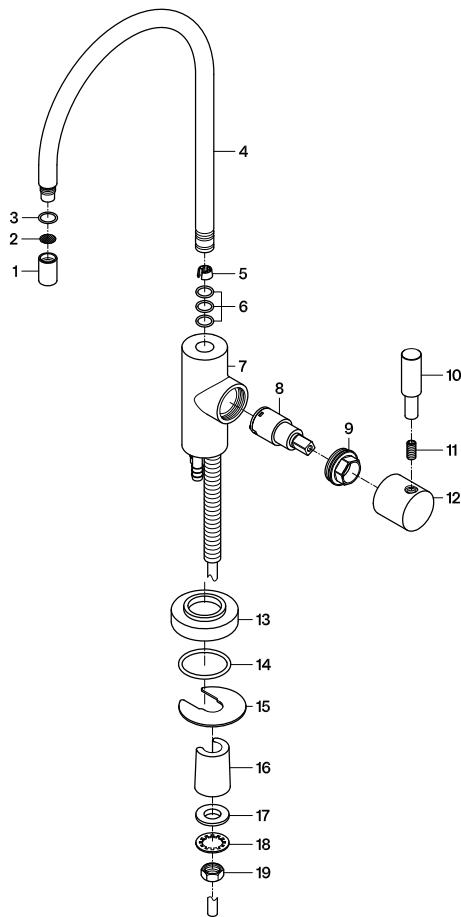


Parts:

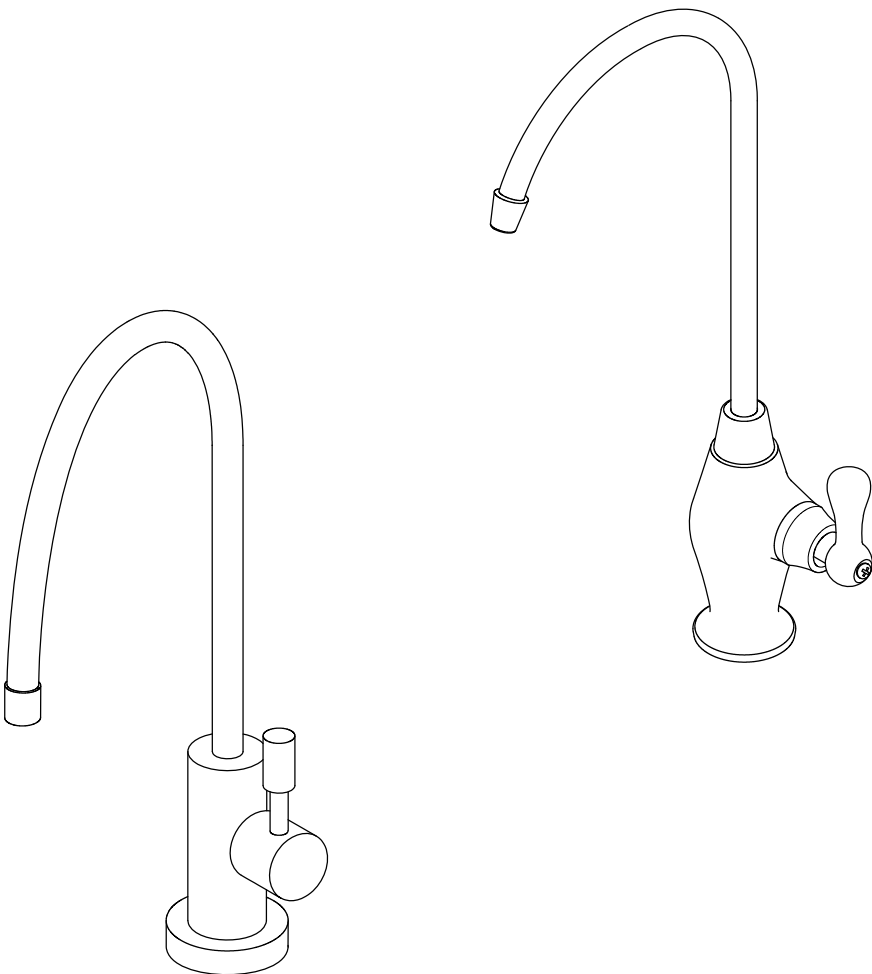

Replacement Parts:

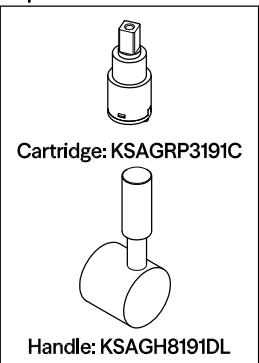

CARE AND MAINTENANCE OF YOUR FAUCET

Your KINGSTON faucet has been finished to the most strict standards; however, due to the high content of minerals in the water, your finish may appear dull and tarnished after time. These are some do's and don'ts to maintain the luster on your faucet for many years to come.




- DO
- 1. Use a silicon based caulking when installing.
 - 2. Clean your faucet with only a mild soap and water solution.
 - 3. Dry your faucet after using it.
 - 4. Give it a coat of Carnauba Wax periodically.

- DON'T
- 1. Use plumbers putty when installing the faucet.
 - 2. Use any abrasive cleaning agents.

It may seem like a very simple and short list but it is that simple to maintain your faucet, looking shiny and new.

If your faucet is already looking somewhat dull and tarnished, before replacing it, try cleaning it with a 50/50 solution of vinegar and water, you may need to soak some rags and wrap around those stubborn areas, leave overnight and rinse completely in the morning, apply Carnauba wax once you have removed the mineral deposits.

Parts:

Spring Washer & Lock Nut	Washer	Support
		
1Pc	1Pc	1Pc

www.kingstonbrass.com
TOLL-FREE CUSTOMER SERVICE: 1-877-2-KBRASS
TECHNICAL SUPPORT E-mail: service@kingstonbrass.com
12775 Reservoir Street, Chino, CA 91710

NOTICE

Failure to follow all directions may cause leaks which may result in water damage

KINGSTON


INSTALLATION INSTRUCTIONS

Water Filtration Faucet

Prior To Installation You Will Need:


1. Shut off water supply valve.
2. Depending on what type of supply line is presently installed for your kitchen faucet you will need.

Either




3 way angle stop where 1 on the outlets will accommodate a 1/4" compression line or any variation


OR



A saddle valve with a 1/4" compression outlet




A 1/4" Drain Saddle valve




1/4" Tubing for R.O System

1

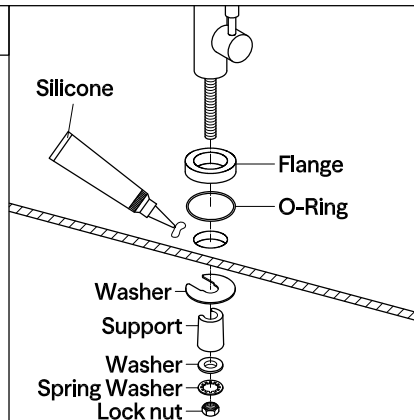


1. Insert escutcheon and rubber washer onto faucet shank apply a bead of silicone based caulking around the perimeter and insert into the desired location in the counter. From below insert split washer, spacer and lock washer, secure by threading locking nut, make sure that air gap hole is facing the sink.

2

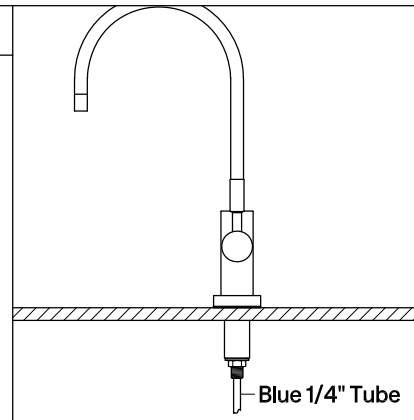


2. Attach blue 1/4" tube to filters outlet.

Need Tools:




Basin Wrench




Adjustable Wrench



Teflon Tape




Silicone Sealant




Screwdriver

3

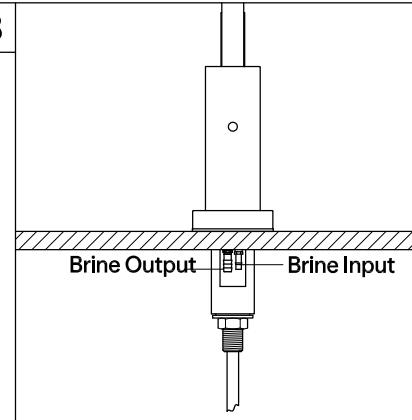

3. Insert brine outlet tubing to faucets brine inlet, insert 1/4" tubing from brine outlet to drain saddle valve.

4

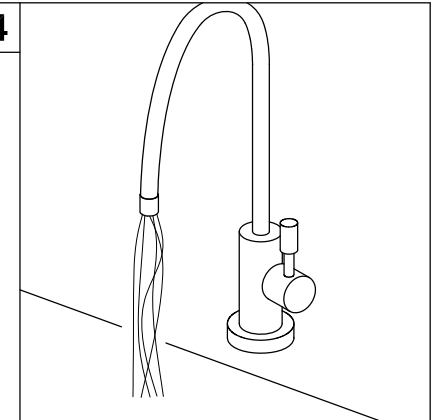

4. Open water supply valves, turn on faucet and allow water to run for at least one minute, this will clear any debris on the line, you may also check for leaks at this time.

Warning!!!

- Do not over-tighten nut during installation.
- Over-tighten may crack the valve and cause severe leak.



CAUTION

Avoid sharp edges.



WARNING

This filtration faucet is designed to be used solely to dispense cold water from a filtration water system, dispensing hot water or water not coming from a filtration water system may cause leaking and it could be hazardous to the user.