


KINGSTON

KITCHEN & BATH

INSTALLATION INSTRUCTIONS Bathtub Drain with Overflow Hole

Need Tools:

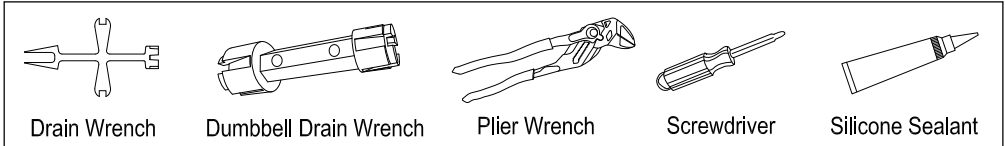


Note:

If you are replacing the drain on an existing floor-mounted free-standing tub, you may need to remove the tub from the floor. Additionally, clean the silicone caulking around the tub before lifting it for drain replacement.

INSTALLATION:

1. Remove the Old Drain: Carefully flip the tub over. Use pliers to loosen the locknut, or insert a dumbbell drain wrench from the backside of the drain and turn clockwise to loosen.
2. Detach the Old Drain: Remove the old drain by loosening the locknut and washer.
3. Clean the Area: Thoroughly clean the area around the tub's drain hole and the bottom surface of the tub. Ensure all silicone caulking is completely removed. If needed, a mixture of vinegar and baking soda can be used for effective cleaning.
4. Apply New Caulking: Apply a new layer of silicone caulking on the tapered surface above the drain hole and on the bottom surface of the tub beneath the drain hole.
5. Install the New Drain: Insert the new drain (part #1) with washer (part #2) into the drain hole from the top of the tub.
6. Secure the Drain: From the underside of the tub, insert washer (part #3) and thread the locknut (part #4). Use pliers, an adjustable wrench or the dumbbell drain wrench from the backside of the drain and turn counterclockwise to tighten.
7. Final Steps: Wipe away any excess caulking. Press the drain cover to test the on/off operation.

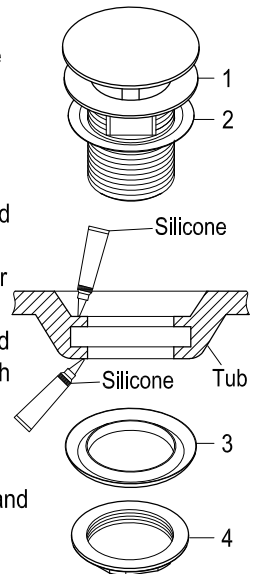

NOTICE

Failure to follow all directions may cause leaks
which may result in water damage

www.kingstonbrass.com

TOLL-FREE CUSTOMER SERVICE: 1-877-2-KBRASS

TECHNICAL SUPPORT E-mail: service@kingstonbrass.com

12775 Reservoir Street, Chino, CA 91710