


# Repair Instruction Manual -GS127 \*

## Change Pull-out Sprayer Tube

Page 1/2

Repair Tool :

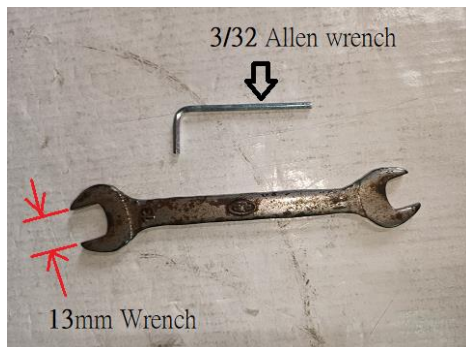

**Step 1 :** Use allen wrench (3/32" size) to loosen the set screw and pull out the spout



**Step 2 :** Use 13mm Wrench to remove the pull-down tube  
The white Teflon C-clip also needs to be taken out if left inside the body



**Step 3 :** Remove the defective tube and put in a new tube inside the spout



**Step 4 :** Put the white Teflon C-clip back on the spout body



**Step 5 :** Use wrench to turn and tighten up the hex nut all the way down to connect the tube with the body



**Step 6 :** Adjust and make sure the upper C-clip's small hole is to align with set screw hole of the body



**Step 7 :** Tighten up the set screw with allen wrench

