
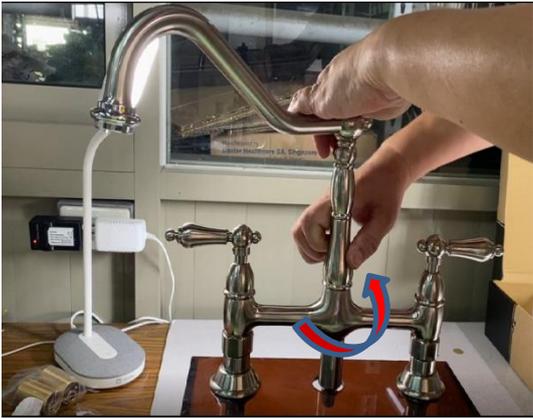


Repair Instruction Manual for KS127*ALBS Diverter


Tools	Needle Nose Pliers 	12mm Hex Allen Wrench 
Repair part	Diverter part (# KSRP1271D) 	
Step	Photo	Description
1.		By hand turn bottom portion of the spout counter-clockwise and carefully pull up to remove it.
2.		Insert a 12mm Hexagonal Allen wrench and turn counter clockwise to unthread the diverter sitting at the bottom of the well.

3.

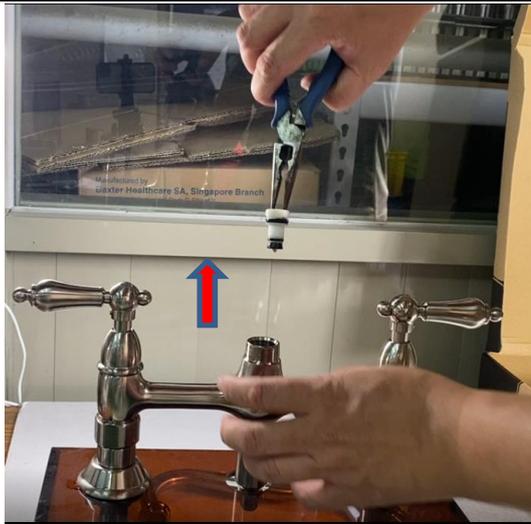

Using needle nose plier pull diverter out.

4.

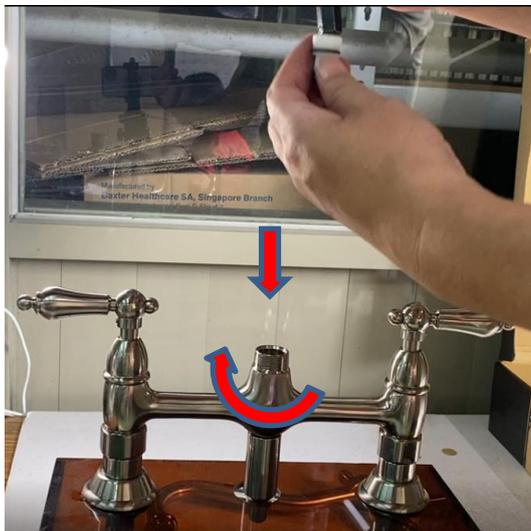

Insert new Diverter into the well and lock in place by threading it in place (about 4-5 turns) using 12mm Hexagonal Allen Wrench.

5.



Install spout by turning clockwise by hand