


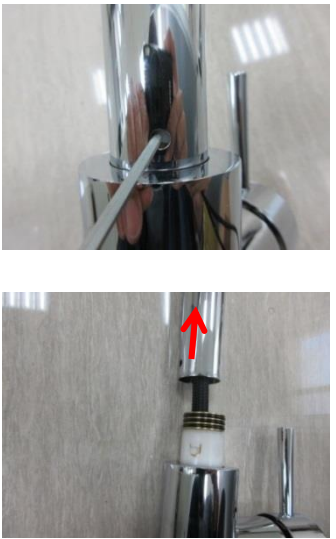





Repair Instruction Manual for Pull Down Kitchen Faucet Hose

Tools	<p style="text-align: center;">Ø 3~5mm Pin</p> 	
Repair part	<p style="text-align: center;">59" Hose</p> 	
Step	Photo	Description
1.		<p>Remove the spray head from the hose by turning counter-clockwise</p>
2.		<p>Use a Pin (Ø 3-5 mm) to press the round white plastic inside the hole on the spout housing.</p> <p>Remove the spout housing from the faucet body.</p>

3.		Slowly and carefully pull the hose out of the faucet body and spout housing.
4.		Insert the new repairing hose from the outlet of spout housing and into the faucet body
5.		Install the spout housing onto faucet body by pushing down. Make sure the orientation hole is aligned with the white projecting button.

6.



Install the spray head onto the hose and then slowly pull down the hose.