



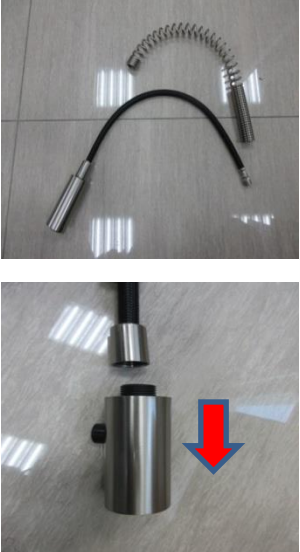





Repair Instruction Manual for Pull Down Kitchen Faucet Hose

Tools	<p style="text-align: center;">Adjustable Wrench</p> 	
Repair part	<p style="text-align: center;">29-15/16" " Hose</p> 	
Step	Photo	Description
1.		<p>Pull up the SS spring housing to remove it from the faucet body</p>
2.		<p>Use a wrench to loosen the hose adapter by turning counter-clockwise. Remove the hose from the faucet body.</p>

3.		<p>Remove the hose out of the SS spring housing and then remove the spray head from the hose by turning it counter-clock wise.</p>
4.		<p>Insert a new repairing hose inside the SS spring housing</p>
5.		<p>Install the hose onto the faucet body by tuning the hose adapter clockwise with a wrench. Make sure it is properly tighten up.</p>
6.		<p>Press down the SS spring housing to install it onto faucet body.</p>

7.



Install the spray head onto hose by turning clockwise.