


Parts:


Replacement Parts:



Hot Cartridge: KSRPL8100HC

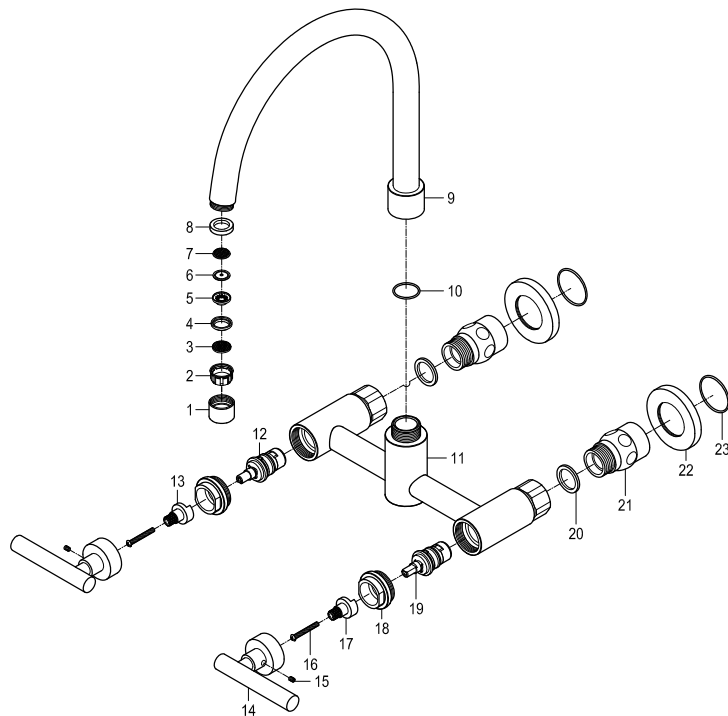



Cold Cartridge: KSRPL8100CC



Handle: KSH8271CML

KINGSTON

KITCHEN & BATH

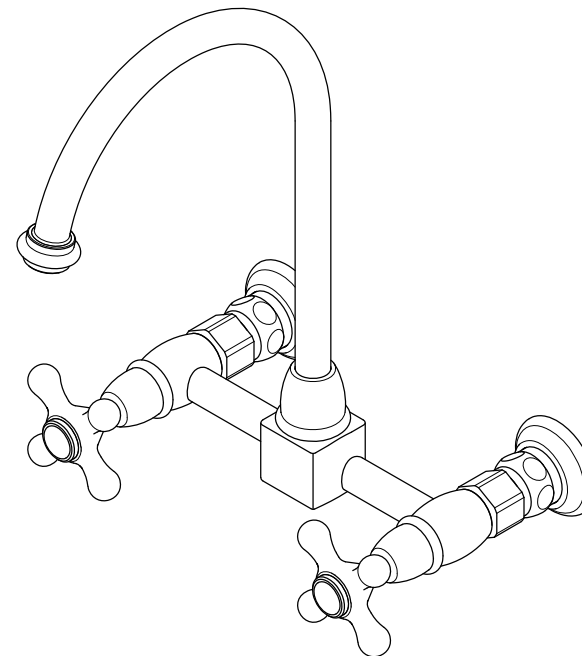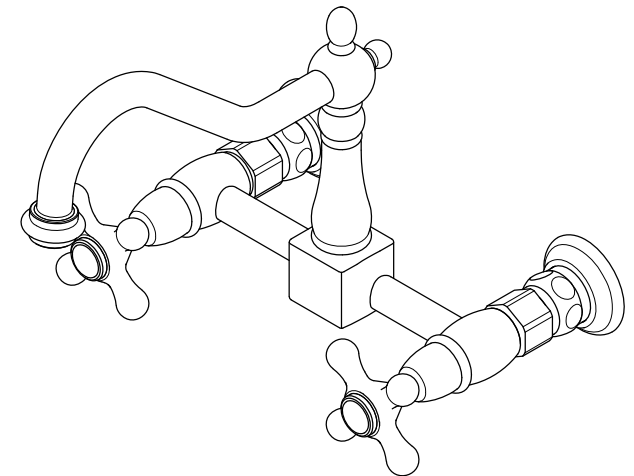

CARE AND MAINTENANCE OF YOUR FAUCET

Your Kingston Brass faucet has been finished to the most strict standards; however, due to the high content of minerals in the water, your finish may appear dull and tarnished after time. These are some do's and don'ts to maintain the luster on your faucet for many years to come.

DO

1. Use a silicon based caulking when installing.
2. Clean your faucet with only a mild soap and water solution.
3. Dry your faucet after using it.
4. Give it a coat of Carnauba Wax periodically.

DON'T

1. Use plumbers putty when installing the faucet.
2. Use any abrasive cleaning agents.

It may seem like a very simple and short list but it is that simple to maintain your faucet, looking shiny and new.

If your faucet is already looking somewhat dull and tarnished, before replacing it, try cleaning it with a 50/50 solution of vinegar and water, you may need to soak some rags and wrap around those stubborn areas, leave overnight and rinse completely in the morning, apply Carnauba wax once you have removed the mineral deposits.

www.kingstonbrass.com

TOLL-FREE CUSTOMER SERVICE: 1-877-2-KBRASS

TECHNICAL SUPPORT E-mail: service@kingstonbrass.com

12775 Reservoir Street, Chino, CA 91710

NOTICE

Failure to follow all directions may cause leaks
which may result in water damage

CAUTION

Failure to follow all installation directions may
cause product to detach from the wall and
cause serious injury

KINGSTON


KITCHEN & BATH

INSTALLATION INSTRUCTIONS Twin Handles Wall Mount Kitchen Faucet

BEFORE BEGINNING INSTALLATION:


1. Flush plumbing lines to clear any debris.
2. Shut off both supply lines after flushing.

1

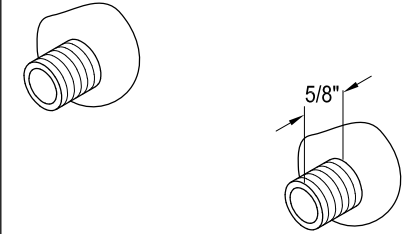


1. Plumb two 1/2 -14 NPT nipples protruding from the finished wall 5/8" at 8" center to center.

2

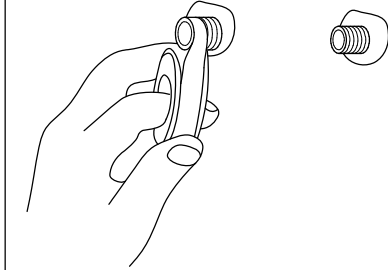


2. Apply Teflon tape onto the threads of both stub-out supply nipples.

3

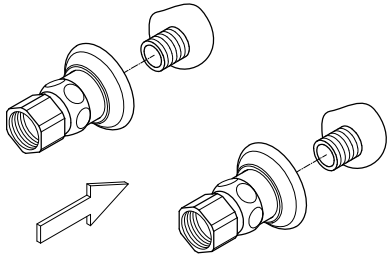

3. Remove elbows from faucet body and install to water outlet on wall with an adjustable wrench. **Do Not Over-tighten.**

4

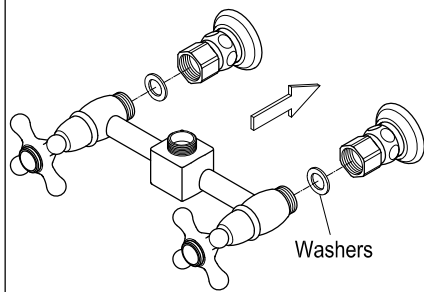

4. Before mounting the faucet onto supply elbows, apply small black washers onto both elbows.


Need Tools:



Adjustable Wrench




Teflon Tape




Screwdriver

5

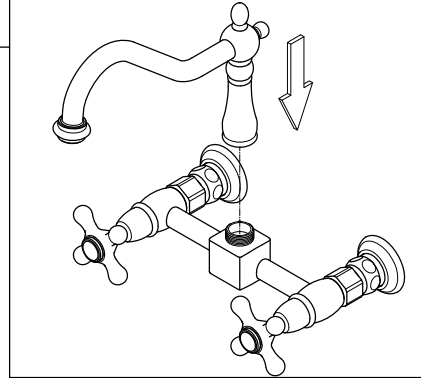


5. Install spout to faucet body and tighten it.

6

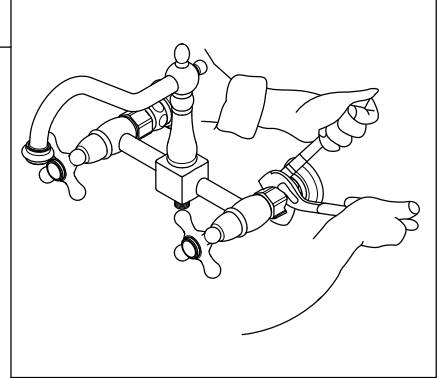

6. Install faucet body to supply elbows and tighten with an adjustable wrench.

7

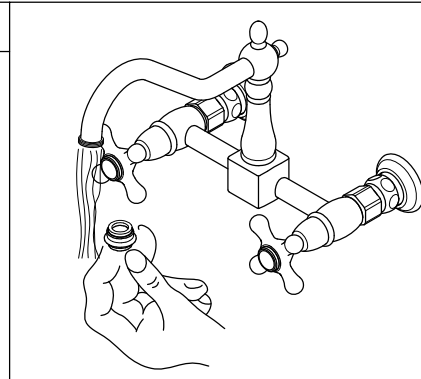

7. Remove the aerator and open both valves, let water run 30 seconds or more, while water is running check for leaks, shut-off water and replace aerator.